




MFG

T

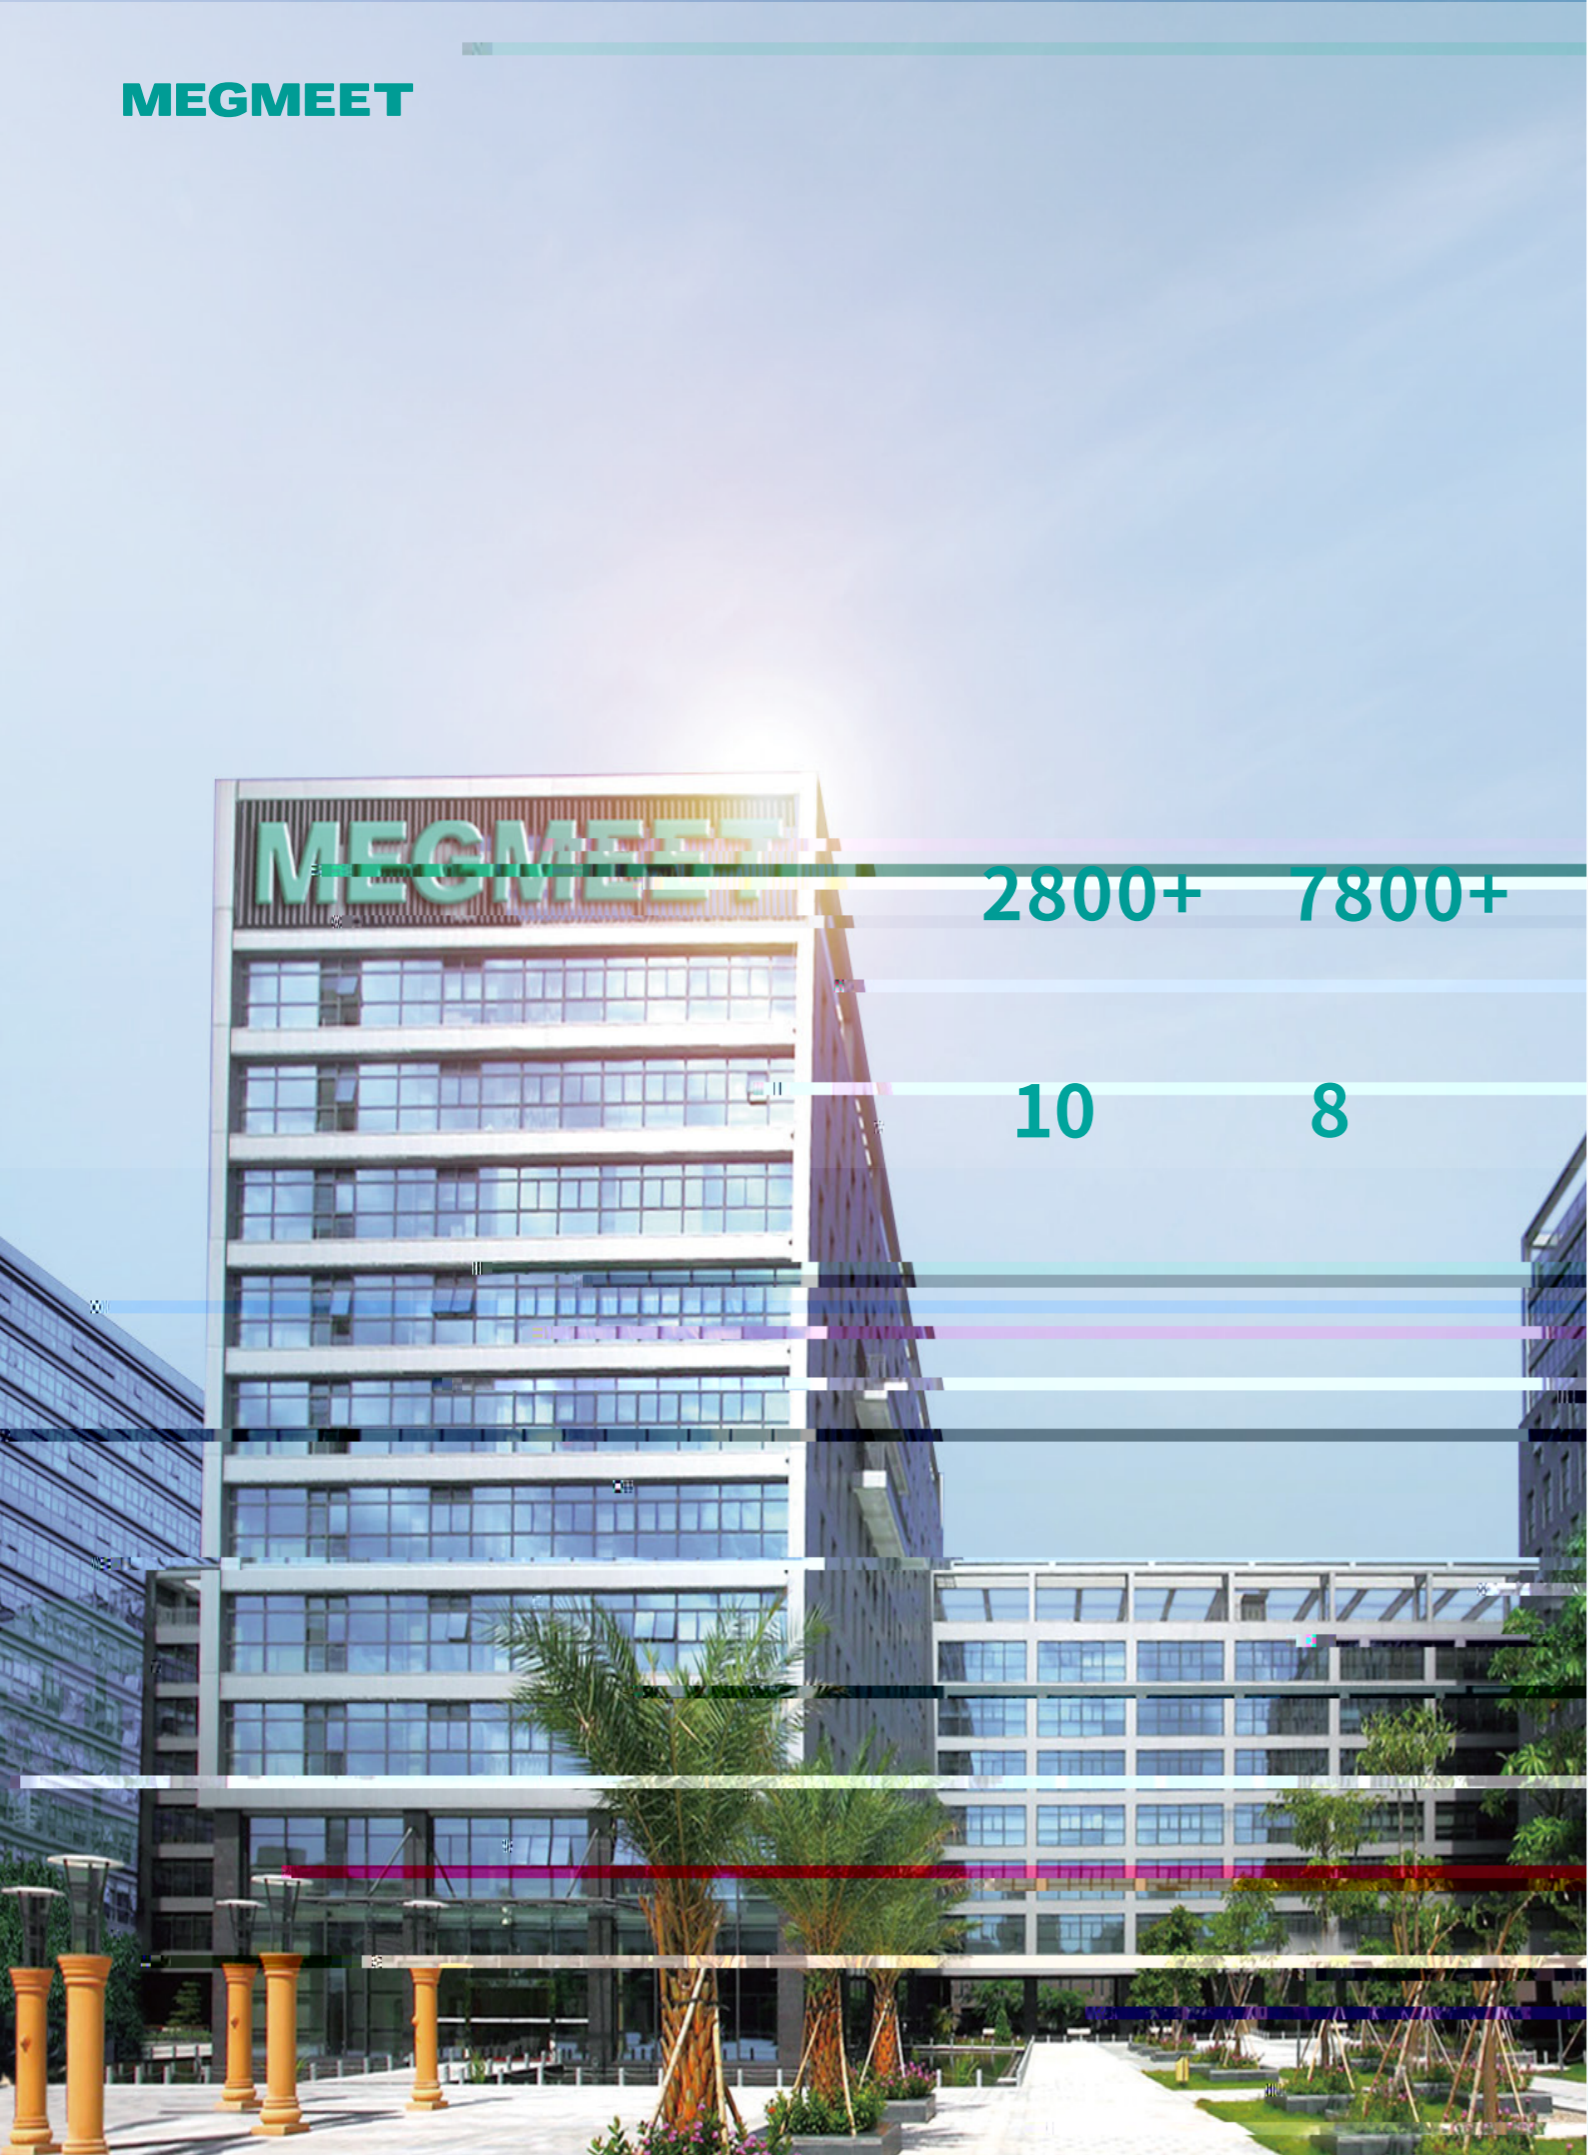

2800+ 7800+

10 8

Contents

Medium PLC

MC6000
MC5000

Small PLC

MU 300
MU 200
MC280/200E
MC200
MC100

MC700 Series Motion Controller

MC700 Series Motion Controller

Remote I/O Module

MC5000S Remote I/O Module

MLINK

Mlink Remote Wireless Module

Intelligent Temperature Controller

MTC/MTCW/MTCV/MTCE/MDT/MQT Series

Cable List

Cable List

HMI

MZ 800 Series

conforms to PLCopen specification and IEC61131-3 standard.



Built-in 200KHz high-speed I/O(8 * DI+8 * DO)

16MB program capacity, 16MB data capacity, 256MB storage capacity, 64KB+4KB retention on power down



Based on pulse output: 2M difference 100K collector, 8PO expansion, control up to 38 pulse axis


and 100K-step standard program executes no more than 2.2ms

320K-step program capacity, 2M Byte C language, 2M Byte data capacity

MC5 0 0 0 E A 16

0 Bus controller 0 Cluster terminal
 1 Pulse controller 1 Euroblock M: MECHATROLINK-III* B: 4-axis collector 200K pulse output
 2 General controller C: CANopen*
 P: Profibus*

*





-
-



- significantly improved based on ARM+FPGA
- Support 8-channel 200K high-speed pulse output and single-phase pulse count, or 4-channel 100K AB-phase, CW/CCW, pulse+direction
-



-
-
-
-
-
-
-
-
-

-
-
-
-
-
-



[Redacted Section Header]

-
-

[Redacted Section Header]

-
-
-

[Redacted Section Header]

-
-
-

[Redacted Section Header]

-
-

[Redacted Section Header]

-



[Redacted Section Header]

- [Redacted]
- [Redacted]

[Redacted Section Header]

- [Redacted]

[Redacted Section Header]

- [Redacted]
- [Redacted]

[Redacted Section Header]

- [Redacted]



meet the diversified choices of customers.



Digital quantity, analog quantity, temperature and other modules can be configured randomly



- TECHNICAL SUPPORT
- SALES
- MARKETING
- OPERATIONS
- FINANCE

